

Ascender 48 - Ref. ASC4806

Powerful multi-screen Seamless Switcher based on **Analog Way's** new **LiveCore™** platform, state-of-the-art processing, Soft Edge and 4K capabilities for top-notch presentations



INPUTS



OUTPUTS



FEATURES



Ascender 48 at a glance

- ▶ New **LiveCore™** platform
- ▶ 12 Seamless inputs and 42 input plugs
- ▶ Independent Preview/Mosaic/Monitoring output
- ▶ Full live Preview of all sources (Preview/Mosaic/Monitoring)
- ▶ Customization of monitoring layouts (Up to 8 templates stored)
- ▶ 6 true-Seamless scaled layers + 1 native background layer per output
- ▶ Advanced Layer Management
- ▶ Rotation capability in output (step by 90 degrees)
- ▶ Outstanding visual effects
- ▶ Collaborative architecture
- ▶ Ruggedized and heavy-duty design
- ▶ User-friendly and intuitive Graphic Interface
- ▶ Remote Services
- ▶ Additive modularity


Option

- ▶ **OPT-SPS**: Swappable Power Supply
- ▶ **OPT-LINK**: Replacement LiveCore™ Link Cable (spare)
- ▶ **OPT-KIT3xLINK**: Set of 3 LiveCore™ Link Cables
- ▶ **OPT-4K-ASC4806-PL**: 4K processing and Perspective Layer upgrade for ASC4806 (4K@30Hz 4:4:4/@60Hz 4:2:0/@60Hz 4:4:4)
- ▶ **SPU001**: Secure Power Unit
- ▶ **500133**: Extension Warranty 2 years (5 years total)

To Control Ascender 48

- ▶ Web-based Remote Control Software (Web RCS)
- ▶ **VRC300**: Vertige™
- ▶ **SB-80**: Shot Box
- ▶ **Crestron's Modules**: 2 or 3-Series*
- ▶ **AMX's Modules***

*Available on www.analogway.com

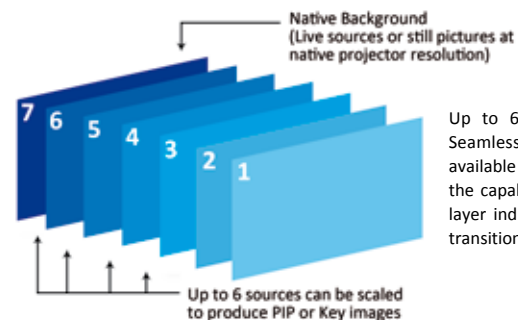

Up to 6 independent true-Seamless scaled layers are available per screen, offering the capability to control each layer individually in time and transition.



Video available on YouTube or on www.analogway.com



Key features

▶ 12 Seamless inputs and 42 input plugs

- 6 x HDMI
- 9 x DVI-I (3 DVI Dual Link included)
- 3 x DisplayPort (4-Lanes)
- 12 x 3G/HD/SD-SDI
- 12 x Universal Analog (6x HD15 & 6xDVI-A)

▶ 4 outputs with 5 output plugs

- Universal Analog (HD15 & DVI-A)
- DVI-I (DVI Dual Link available on output #1 and #3)
- 3G/HD/SD-SDI
- Video Optical SFP module cage

▶ Features & Effects

- Up to 6 true-Seamless scaled layers per screen
- Independent Native Background
- 144 presets
- 50 Frames + 50 Logos memory bank
- Frames and Logos: fully resizable
- True A/B mix
- Output capability up to 2560x1600 and 4K
- Customizable 4-display layouts: Full Preview, Live Mosaic, Monitoring and Recording
- Display configurations: Mixer, Hybrid, Hard Edge & Soft Edge
- Additive modularity: combine 2 Ascender 48 to share/add inputs & outputs up to 24x8
- Layer border: Edge/Smooth/Shadow/Smooth Edge (Edge: color/width/height)
- New tools box for layers: Transitions, Effects, Speed, Timing, Faders, Strobe, Mirror,...
- Numerous effects: Cut, Dissolve, Slide, Wipe, Stretch, Circle, Depth, Flip, Flying Curve, Background Cut, Transparency, Luma/Chroma Key, DSK
- New Web-based Remote Control Software for multiple users: **Web RCS**
- Remote Tools
- Remote Services

Web RCS



- The **Web RCS** offers a user-friendly graphic interface consisting of 3 independent sections: Setup, Edit and Live. A Preconfig. mode indicates how to easily configure the device step by step.
- With dynamic snapshots of the connected sources available in the interface, the intuitive dashboard allows operators to fully prepare their shows and control them live during their events.
- An innovative Sequences mode allows easy organization of presets through drag and drop operation.

In addition to its four main outputs, **Ascender 48** features an independent Dual-Link output for monitoring purposes.

This output offers versatile and customizable display options, ensuring effective monitoring and flawless show control. All images are live and can be labeled through Web Remote Control Software. Additional information on each source is also available directly on the live video windows.

Full Preview



Live Mosaic



Dimensions:

- ▶ D 21.41" x W 17.51" x H 6.97" ("Rack ears" not included)
- ▶ D 544 mm x W 444.8 mm x H 177 mm ("Rack ears" not included)

Weight:

- ▶ 19 kg
- ▶ 41.89 lbs

Power Supply:

100-240 VAC ; 4.8A ; 50/60Hz ; 285 W

Supplied with:

- ▶ 1 x Power supply cord
- ▶ 1 x Ethernet cross cable (for device control)
- ▶ 1 x MCO 10 pin connector
- ▶ 1 x Web-based Remote Control Software included and hosted on the device
- ▶ 1 x Rack mount kit (front ears and rear support)
- ▶ 1 x User Manual (PDF version)*
- ▶ 1 x Quick Start Guide*

Warranty:

3-year warranty on parts and labor back to factory.



* All User Manuals and Quick Start Guides are also available on www.analogway.com

ⓘ Specifications subject to change without prior notice

All technical specifications are available on our website